

10/04/00

30923 U.S. PTO



30923 U.S. PTO

09/678893

10/04/00

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No. 35.C14845

First Named Inventor or Application Identifier

ATSUSHI KAKIMOTO

Express Mail Label No.

Commissioner for Patents
Box Patent Application
Washington, DC 20231

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

1. ☐ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)2. ☐ Applicant claims small entity status.
See 37 CFR 1.27.3. ☒ Specification Total Pages **65**4. ☒ Drawing(s) (35 USC 113) Total Sheets **18**5. ☐ Oath or Declaration Total Pages **1**a. ☐ Newly executed (original or copy)b. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 6 below]i. ☐ DELETION OF INVENTOR(S)
Signed Statement attached deleting inventor(s)
named in the prior application, see 37 CFR
1.63(d)(2) and 1.33(b).6. ☒ Application Data Sheet. See 37 CFR 1.767. ☐ CD-ROM or CD-R in duplicate, large table or Computer
Program (Appendix)8. ☐ Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)a. ☐ Computer Readable Form (CRF)

b. Specification Sequence Listing on:

i. ☐ CD-ROM or CD-R (2 copies); orii. ☐ paperc. ☐ Statements verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

9. ☐ Assignment Papers (cover sheet & document(s))10. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) ☐ Power of Attorney11. ☐ English Translation Document (if applicable)12. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS
Citations13. ☐ Preliminary Amendment14. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)16. ☐ Other: _____

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. ____/
Prior application information: Examiner _____ Group/Art Unit: _____

For CONTINUATION OR DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 5b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

18. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label **05514** (Insert Customer No. or Attach bar code label here) or ☐ Correspondence address below

NAME

Address

City

State

Zip Code

Country

Telephone

Fax



CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
TOTAL CLAIMS (37 CFR 1.16(c))		24-20 =	4	X \$ 18.00 =	\$72.00
INDEPENDENT CLAIMS (37 CFR 1.16(b))		3-3 =	0	X \$ 80.00 =	\$ 0.00
MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))				\$260.00 =	\$ 0.00
				BASIC FEE (37 CFR 1.16(a))	\$710.00
Total of above Calculations =					\$782.00
Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).					
TOTAL =					\$782.00

19. Small entity status

- a. ☐ A small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.


20. ☒ A check in the amount of \$ 782.00 to cover the filing fee is enclosed.

21. ☐ A check in the amount of \$ _____ to cover the recordal fee is enclosed.

22. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 08-1205:

- a. ☒ Fees required under 37 CFR 1.16.
- b. ☒ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED

NAME	Leonard P. Diana (Reg. No. 29,296)
SIGNATURE	
DATE	October 3, 2000

INVENTOR INFORMATION

Inventor One Given Name:: ATSUSHI
Family Name:: KAKIMOTO
Postal Address Line One:: 24-7-402, Minami Yamata 2-chome,
Postal Address Line Two:: Tsuzuki-ku, Yokohama-shi
City:: Kanagawa-ken
Country:: Japan
Country of Residence:: Japan
Citizenship Country:: Japan

CORRESPONDENCE INFORMATION

Correspondence Customer Number:: 05514
Fax:: (212) 218-2200

APPLICATION INFORMATION

Title Line One:: INFORMATION MANAGEMENT METHOD IN NETWORK
Title Line Two:: SYSTEM

Total Drawing Sheets:: 18
Formal Drawings?: Yes
Application Type:: Utility
Docket Number:: 35.C14845
Secrecy Order in Parent Appl.?: No

REPRESENTATIVE INFORMATION

Representative Customer Number:: 5514

PRIOR FOREIGN APPLICATIONS

Foreign Application One:: 11-283096
Filing Date:: 10-04-99
Country:: Japan
Priority Claimed:: Yes
Foreign Application Two:: 11-238097
Filing Date:: 10-04-99
Country:: Japan
Priority Claimed:: Yes
Foreign Application Three:: 2000-303114
Filing Date:: 10-03-00
Country:: Japan
Priority Claimed:: Yes

09672333-100400

INFORMATION MANAGEMENT METHOD
IN NETWORK SYSTEM

BACKGROUND OF THE INVENTION

5 Field of the Invention

The present invention relates to management technology for a network device, particularly a network input/output device such as a printer, a scanner or a facsimile locally connected to an information processing apparatus such as a computer or the like.

Related Background Art

For example in a network system in which plural terminal or host apparatus such as a personal computer (hereinafter also represented as PC) are so connected as to be capable of mutual communication, there is known a system allowing to use various devices (hereinafter also called resources) for example a printer, an image input device such as a scanner or a disk driver locally connected to a terminal apparatus from other terminal apparatus through the network.

In such conventional network system, however, it has not been possible to manage the resources (commonly shared devices) usable by other terminal apparatus through the network and to efficiently check the status of each resource. More specifically it has not been possible to confirm the status of a commonly

03678893-100400

shared device desired on the network by designating such device. Also it has not been possible to automatically acquire the latest status information of the commonly shared device on the network.

5

SUMMARY OF THE INVENTION

In consideration of the foregoing, the object of the present invention is to provide an information processing method for use in a network system enabling unified efficient management of the commonly shared devices on the network constantly by latest status information, and an information processing apparatus for executing such method.

The above-mentioned object can be attained, according to the present invention, by an information processing apparatus for use in a network system including plural information processing apparatus connected to a commonly shared device which is usable from another apparatus through the network, the information processing apparatus being featured in the following manner. The information of a shared device present in the above-mentioned network system is managed by management means, and the information of the shared device in the management means is renewed according to the received information of the shared device connected to another information processing apparatus. Also the information processing apparatus

09678893:100400

transmits the information of the shared device,
connected to the own host apparatus, to other
apparatus on the network system.

5 BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram showing the
configuration of a network system embodying the
present invention;

Fig. 2 is a block diagram showing the
10 configuration of a host terminal apparatus on the
network system;

Fig. 3 is a view showing the module
configuration, in the above-mentioned network system,
between the server function of a host terminal
15 apparatus serving as a server side and the client
function of a host terminal apparatus serving as a
client side;

Fig. 4 is a view showing the module configuration
of the above-mentioned server function and client
20 function within a same host terminal apparatus;

Fig. 5 is a view showing local management
information of the above-mentioned host terminal
apparatus;

Fig. 6 is a view showing resource information of
25 the above-mentioned local management information;

Fig. 7 is a view showing management information
of all the shared devices in the network system;

03678893-100400

Fig. 8 is a view showing data structure used in communication between the host terminal apparatus;

Fig. 9 is a view showing an image displayed on the host terminal apparatus;

5 Fig. 10 is a flow chart showing the start-up function of the host terminal apparatus;

Fig. 11 is a flow chart showing a status changing operation (server side) of the shared device in the network system;

10 Fig. 12 is a flow chart showing a status changing operation (client side) of the shared device in the network system;

15 Fig. 13 is a flow chart showing an operation for acquiring the status information of a designated resource in the above-mentioned host terminal apparatus;

Fig. 14 is a flow chart showing an access operation to the shared device in the network system;

20 Fig. 15 is a flow chart showing an addition/renewal process for the management information of all the shared devices in a second embodiment;

25 Fig. 16 is a flow chart showing an log-off operation of the host terminal apparatus in the second embodiment;

Fig. 17 is a flow chart of a start-up process of the host terminal apparatus in a third embodiment; and

09678893-100400

Fig. 18 is a flow chart of a start-up process of the host terminal apparatus in a fourth embodiment.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

5 Now the present invention will be clarified in detail by preferred embodiments thereof, with reference to the accompanying drawings.
[First embodiment]

10 The present invention is applicable for example to a network system 100 as shown in Fig. 1. The network system 100 is composed, as shown in Fig. 1, of plural terminal apparatus (host apparatus) 110₁, 110₂, 110₃, 120 which are so connected as to be capable of mutual communication through the network 130. The
15 number of the host terminal apparatus is not limited to four but can be arbitrarily selected.

20 The host terminal apparatus 110₁, 110₂, 110₃ are constructed similarly, and each apparatus is provided with a network server function 111 and a network client function 112. With the network server function 111 there are connected various resources 113₁ to 113_n, such as a printer, an image input device, a disk drive etc. The resource means a device connected locally to the host terminal apparatus.

25 The host terminal apparatus 120 is provided with a management (administration) function 121 in the network 130 and a network client function 122. The

management function 121 is provided with a function similar to the network server function 111 and a management function for each host terminal apparatus, and the network client function 122 is similar to the network client function 112. It is to be noted that the host terminal apparatus 120 having the management function 121 is not essential but may be constructed similar to the host terminal apparatus 110₁, 110₂, 110₃.

In the network system 100 of the present embodiment, as explained in the foregoing, each of the host terminal apparatus 110₁, 110₂, 110₃ is provided with both of the network server function 111 (server module) and the network client function 112 (client module), and these functions are exhibited similarly regardless whether these functions are present in different host terminal apparatus on the network 130 or in a same host terminal apparatus. In the following there will be given a detailed explanation on the network system 100 of the present embodiment. [Internal configuration of the host terminal apparatus 110₁, 110₂, 110₃, 120]

The host terminal apparatus 110₁, 110₂, 110₃, 120 are constructed with a similar internal configuration. In the following, for the purpose of simplicity, there will be explained the configuration of the host terminal apparatus 110₁ as a representative example,

and the other host terminal apparatus 110₂, 110₃, 120 will not be explained further as they are similar in the configuration to the host terminal apparatus 110.

The host terminal apparatus 110₁ is capable of

5 disclosing the information of the device (resource) locally connected thereto, and is provided, for example as shown in Fig. 2, with a CPU (central processing unit) 2 for controlling the functions of the entire apparatus, a program memory (PMEM) 3 for

10 storing various programs and data for the operation control in the CPU 2, a communication control unit 4 for controlling the communication with other apparatus on the network 130, an external memory control unit 8 for controlling the data memory function in a floppy

15 disk (FD) 9 or a hard disk (HD) 10 constituting a memory medium for data files, an input control unit 11 for controlling the input operation from a keyboard 12 or a mouse 13 constituting an operation unit, a video image memory (VRAM) 14 for storing display data for a

20 CRT 16 constituting a display device, a display output control unit 15 for controlling the display operation of the CRT 16, a printer control unit 17 for controlling the printout operation of a printer 18, an image input device control unit 1A for controlling the

25 image input operation of an image input device 1B, and an external device control unit 19 for controlling the printer control unit 17 and the image input device

2025 RELEASE UNDER E.O. 14176

control unit 1A, wherein these components are so connected as to be capable of mutual data exchange through a system bus 1.

03678893-10400
The PMEM 3 stores control programs for executing
5 various operations including those featuring the present embodiment as will be explained later. More specifically, such control programs are stored in advance in the HD 10, and the CPU 2 suitably selects and reads such programs from the HD 10, develops them
10 on the PMEM 3 and executes them. Thus there can be realized various operations featuring the present embodiment.

The PMEM 3 also functions as a text memory. Consequently the PMEM 3 stores for example data
15 entered from the keyboard 12 in the form of code information.

The communication control unit 4 controls the input/output data in a communication port 5. Thus the data outputted from the communication port 5 are
20 transmitted, through a communication line 6, to the communication of another apparatus on the network 130.

The communication control unit 4 also executes control for the data exchange with a shared device (printer or image input device) on the network 130.

25 In the foregoing, the network communication with other apparatus on the network 130 is executed by the communication control unit 4, communication port 5 and

communication line 6, but such configuration is not restrictive and the present invention is naturally applicable to the communication through a public line.

5 The input control unit 11 transmits the operation information (system operation command etc.) entered by the user through the keyboard 12 and the mouse 13 to the CPU 2.

30670007-100400
10 The mouse 13 is an operation unit constituting a pointing device (PD) for instructing editing etc. of image information on the CRT 16. By means of the mouse 13, the user can instruct a desired process for example by moving a cursor in the X and Y directions on the image displayed on the CRT 16 and selecting a command icon on a command menu, and also can designate
15 an image to be edited or a position for image drawing.

In the VRAM 14, data to be displayed on the CRT 16 by the control of the display output control unit 15 are developed as bit map data.

20 The external device control unit 19 controls the printer control unit 17 and the image input device control unit 1A according to the instruction from another apparatus on the network 130. Therefore, the printer 18 and the image input device 1B function
25 mentioned above.

[Module configuration of network server function
111 and network client function 112]

As explained in the foregoing, each of the host terminal apparatus 110₁, 110₂, 110₃, 120 is provided with the network server function 111 and the network client function 112 (cf. Fig. 1). Also the network server function 111 and the network client function 112 are so constructed as to function in the same manner regardless whether they are present in different host terminal apparatus on the network 130 or in a same host terminal apparatus.

Fig. 3 shows the relationship between the modules constituting the network server function 111 and the network client function 112 in case the network client function 112 of an arbitrary one of the host terminal apparatus 110₁, 110₂, 110₃, 120 (host terminal apparatus at the client side, hereinafter called "client side host terminal apparatus A") uses the shared device connected to a host terminal apparatus B through the network 130, utilizing the network server function 111 of another host terminal apparatus (host terminal apparatus at the server side, hereinafter called "server side host terminal apparatus B").

The network client function 112 is a function for exchanging desired data with other apparatus through the network 130, and is composed, as shown in Fig. 3, of a module group including a client message manager 21, a client expansion function manager 22, a client expansion function addition/deletion management module

The resource request modules 31₁ to 31_N are used for acquiring information of resources (shared devices) R₁ to R_N set commonly on the network 130 and using such resources by the own host apparatus (client side host terminal apparatus A).

The resource request modules 31₁ to 31_n and the license confirmation module 41 are client expansion function modules and can add an arbitrary function to the own host apparatus (client side host apparatus A) by providing a defined interface to the client expansion manager 22.

The client expansion function addition/deletion module 23 regulates the resource request modules 31₁ to 31_N in case a resource to be used by the own host apparatus (client side host apparatus A) is increased or decreased. Also the client expansion function addition/deletion module 23 manages addition or

deletion of the individual client expansion function modules 31_1 to 31_n , 41 in cooperation with the client expansion function manager 22.

The client message manager 21 executes a process
5 of transmitting a request message, generated by the client expansion function modules 31_1 to 31_n , 41, to the network 130 (either transmission to a specified host terminal apparatus or broadcasting to the entire network 130). Also the client message manager 21
10 receives a message from another host terminal apparatus, judges whether or not to process the message, and, in case the message is identified to be processed, asks a process for such message to an appropriate one of the client expansion function
15 modules 31_1 to 31_n , 41.

The client expansion manager 22 receives information obtained by the network client function 112, and asks, through a general interface, a process corresponding to such information to the client
20 expansion function modules 31_1 to 31_n , 41.

On the other hand, the network server function 111 is a function for receiving request information from a desired client on the network 130 (client side host terminal apparatus A in this case), and is
25 composed, as shown in Fig. 3, of a module group including a server message manager 51, a server expansion function manager 52, a server expansion

function addition/deletion management module 53, and
resource management modules 61₁ to 61_N. In Fig. 3, an
entire network information management module 71 and a
license information management module 72 will be
5 explained later.

The resource management modules 61₁ to 61_N are
modules (server expansion modules) for acquiring
information of the plural resources locally connected
to the own host apparatus (server side host terminal
10 apparatus B) and controlling these resources for
rendering them usable. For example, the resource
management module 61 acquires information of the
locally connected plural resources 80₁ to 80_N and
controls these resources thereby rendering them
15 usable.

The server message manager 51 executes a process
of transmitting an information message, generated by
the resource management modules 61₁ to 61_N (server
expansion modules) to the network 130 (either
20 transmission to a specified host terminal apparatus or
broadcasting to the entire network 130). Also the
server message manager 51 receives a message from
another host terminal apparatus, judges whether or not
to process the message, and, in case the message is
25 identified to be processed, asks a process for such
message to an appropriate one of the resource
management modules 61₁ to 61_N (server expansion

09678893-100400

module).

The server expansion manager 52 receives information obtained by the network server function 111, and asks, through a general interface, a process
5 corresponding to such information to the resource management modules 61₁ to 61_n (server expansion module).

The server expansion function addition/deletion module 53 executes addition or deletion of the
10 resource management modules 61₁ to 61_n (server expansion function modules) in cooperation with the server expansion function manager 52.

The entire network information management module 71 and the license management module 72 shown in Fig.
15 3 are modules (server expansion functions) present only in the management server 120 (host terminal apparatus having the management function). More specifically, the management server 120 has a configuration similar to the host terminal apparatus
20 110₁, 110₂, 110₃ (having the network server function 111 and the network client function 112), but is additionally provided with the entire network information management module 71 and the license management module 72.

25 The entire network information management module 71 is used for managing the shared device information (information of all the shared devices connected to

09678893-104401

the respective host terminal apparatus) of all the host terminal apparatus logging on to the management server 120.

The license management module 72 executes
5 information exchange, in case a host terminal apparatus having the network client function 112 executes logging on to the management server 120 in order to utilize various services on the network 130, for confirming whether such logging is entitled.

10 Fig. 4 shows the relationship among the modules constituting the network server function 112 and the network client function 111 within a same host terminal apparatus.

As shown in Fig. 4, the network client function
15 112 and the network server function 111 are so constructed as to be capable of mutual communication through a server/client communication module 81. Based on the presence of the server/client communication module 81 between the network server
20 function 111 and the network client function 112, each module constituting these functions can execute process on the data, without differentiating the data exchange with a module in another host terminal apparatus through the network 130 and the data
25 exchange with a module in the same host terminal apparatus (module within the same local host).

The server/client communication module 81 is also

provided with a data area 82 for storing information to be shared between the network server function 111 and the network client function 112 within the same host terminal apparatus. In the data area 82, there are set the information, acquired by the network server function 111, of the resource locally connected to the own host apparatus and the information on other host terminal apparatus. Thus, for example the resource request modules 31_1 to 31_n constituting the client expansion modules of the network client function 112 can efficiently refer to the resource information in the data area 82, and can provide a request to the desired resource.

[Configuration of local management information of host terminal apparatus]

Fig. 5 shows the configuration of the local management information of the host terminal apparatus 110_1 , 110_2 , 110_3 , 120. The local management information includes information of the own host apparatus and information on the resource managed by the own host apparatus, and is stored in the aforementioned data area 82 shown in Fig. 4. Based on such local management information, the host terminal apparatus 110_1 , 110_2 , 110_3 , 120 generate response data to a request for the information on the own host apparatus, from another host terminal apparatus or from the management server 120.

More specifically, the local management information includes information 201 to 209 as shown in Fig. 5. The information 201 is the number of information items (management information items) constituting the local management information. The information 202 is the network address of the own host apparatus. Other host terminal apparatus issue an access request based on the address information 202. The information 203 is identification information of the currently logged-on user (log-on) user information. The information 204 is security management information, including information for managing the access right to the individual shared device connected to the own terminal apparatus. The information 205 is on the server expansion function (resource management modules 61₁ to 61_N) of the own host apparatus, including information on the server expansion function owned by the own terminal apparatus. The information 206 is resource management information (resource information) under the management of the own terminal apparatus. The details of the resource information 206 will be explained later. The information 207 is on the client expansion function (resource request modules 31₁ to 31_N) of the own terminal apparatus, including information on the client expansion function owned by the own terminal apparatus. The information 208 is license information

09678893-100400

5

10

15

25

device). The information 217 is shared security
information in case the resource R_i is set as shared on
the network 130. Based on the security information
217, there is determined to whom the resource R_i is to
5 be made available. The information 218 is driver
information for driving the resource R_i . The
information 219 is on the color ability of the
resource R_i . For example, it indicates whether the
resource R_i is a color printer. The information 220 is
10 expansion information of the resource R_i . For example,
if the resource R_i is a scanner to which an auto feeder
is connected or is a printer to which a stacker is
connected, the information 220 indicates the expansion
function (auto feeder function, stacker function etc.)
15 for the resource R_i . The information 221 is status
information of the resource R_i , including information
on power on/off status, number of jobs in process,
error state of the resource R_i etc. The information
222 is other resource information of the resource R_i .
20 If the object resource R_x is not set as shared,
the network shared name information 216 becomes NULL
("00"). In such case, the information of the resource
 R_x is not disclosed to other host terminal apparatus.
[Configuration of the entire shared device
25 management information in the network 130]

Fig. 7 shows an example of the configuration of
the information (the entire shared device management

2025 RELEASE UNDER E.O. 14176

information) for managing the resource information 206 etc. of the local management information, shown in Fig. 5, in all the host terminal apparatus.

03878893-10400

The shared device management information is used
5 for managing the shared devices owned by each host terminal apparatus in the network 130, and is held by a host terminal apparatus having the entire network information management module 71 (management server 120 in the present case) if such host terminal
10 apparatus is present in the network 130. Thus, each host terminal apparatus can acquire, whenever necessary, the information on another host terminal apparatus from the shared device management information held by the above-mentioned host terminal
15 apparatus (management server 120). In case the host terminal apparatus having the entire network information management module 71 (management server 120 in the present case) is absent in the network 130, the shared resource management information is
20 collected and stored in each host terminal apparatus.

The entire shared device management information mentioned above includes, as shown in Fig. 7, information 231 on the number of the host terminal apparatus recognized in the network 130 and
25 corresponding to such host terminal apparatus. The access information 232₁ to 232_n are constructed similarly, and, for example, the access information

232_i for the host terminal apparatus 110_i includes information 233 to 237_N.

03678887.100400

The information 233 is address information of the host terminal apparatus 110_i on the network 130. Based on such address information, other host terminal apparatus executes exchange of necessary information. The information 234 is user information currently logged on the host terminal apparatus 110_i. The information 235 is other identification information of the host terminal apparatus 110_i. The identification information 235 includes information indicating the kind of the host terminal apparatus 110_i and information on the operating system employed in the host terminal apparatus 110_i. The information 236 is the number of shared devices connected to the host terminal apparatus 110_i (under the management thereof). The information 237₁ to 237_N are individual information (shared device management information) corresponding to the shared devices R₁ to R_N indicated by the information 236. For example, the information 237₁ is the management information of a shared device R₁. Consequently, based on the information 237₁ to 237_N, other host terminal apparatus issue an access request to the desired shared device.

[Configuration of data exchanged between host terminal apparatus]

Fig. 8 shows an example, in case an arbitrary one

(client side host terminal apparatus) of the host terminal apparatus 110₁, 110₂, 110₃, 120 utilizes a shared resource connected to another host terminal apparatus (server side host terminal apparatus) through the network 130, of the configuration of the data exchanged between the client side host terminal apparatus and the server side host terminal apparatus. As shown in Fig. 8, the data include header information 240 containing information 241 to 245, real transmission data 250 containing information 251 to 256, and sender data 260 containing information 261 to 264.

In the header information 240, the information 241 is used for identifying the present data at the receiving side. The information 242 is version information of the present data. The information 243 is attribute information of the present data. The attribute information includes information indicating the kind of the present data, such as enquiry, response, information or request. The information 244 is offset information of the real transmission data 250. More specifically, it is head address information of the information 252 of the real transmission data 250. The information 245 is other management information of the present data.

In the real transmission data 250, the information 251 is network information of an addressee

5 The information 253 indicates a function actually requested to the server expansion module indicated by the information 252. The information 254 is security information such as a password required in requesting access to the server side host terminal apparatus.

15 In the sender data 260, the information 261 is
network information indicating the sender host
terminal apparatus of the present data. The
information 262 is user information currently logged
on the sender host terminal apparatus of the present
20 data. The information 263 is timeout setting
information indicating the time of disconnection for
the present data request. The information 264 is
other management information for managing the various
information in the sender data 260.

Fig. 9 shows a display state (resource state) of a window image 270 on the CRT 16 of the host terminal

apparatus 110₁, 110₂, 110₃, or 120 on the network 130. This window image 270 displays icons and associated character information, based on the shared device management information as shown in Fig. 7.

5 As shown in Fig. 9, the present window image 270 displays an icon 271 indicating the own terminal apparatus and a usable resource group 272 locally connected to the own terminal apparatus. In the resource group 272, devices (resources) such as a
10 scanner and a printer are displayed with appropriate icons assigned according to the attributes thereof. Also within such resources, a resource set as shared on the network 130 (shared resource) is displayed with a mark indicating the shared device, for example a
15 "hand" mark. The resource displayed with such mark can be used from other host terminal apparatus on the network 130.

Each icon in the resource group 272 displays status information of the object shared device. For
20 example, an icon 272a shown in Fig. 9 displays "2", indicating that two jobs are currently present in the shared device (printer etc.) corresponding to the icon 272a.

25 The present window image 270 also displays an icon 273 indicating a network group, icons 274, 275 indicating the host terminal apparatus present in such network group, and a usable resource group 276 locally

00678893.100400

connected to such host terminal apparatus. The icons indicating the resources in the resource group 276 do not display a mark indicating the shared device, such as the above-mentioned "hand" mark, since the host
5 terminal apparatus 274, 275 are assumed to have no shared device, but an icon 276a in the resource group 276 displays "2", indicating that two jobs are currently present in the shared resource (printer etc.) corresponding to the icon 276a, as in the
10 aforementioned icon 272a.

As explained in the foregoing, there is displayed the status information of the shared device, utilizing the server expansion function and the client expansion function in the present embodiment, whereby the user
15 can immediately understand the state of the resources under the management of the host terminal apparatus in the network 130.

[Start-up function of the host terminal apparatus]

20 Fig. 10 shows a start-up sequence of the host terminal apparatus 110₁, 110₂, 110₃, 120. The operations in this sequence are executed by the license information confirmation module 41.

At first there is detected a terminal apparatus
25 having the management function (management server 120) on the network 130 (step S301), and, based on the result of such detection, there is discriminated

000007-100400

whether the management server 120 is present (step S302). The detection and discrimination of the presence of the management server 120 can be achieved, for example, by broadcasting a message inquiring the presence of the management server 120 (an inquiry message according to the data configuration shown in Fig. 8) on the entire network 130 and discriminating whether a response from the management server 120 (a response message according to the data configuration shown in Fig. 8) is obtained in response to such broadcasting.

If the step S302 identifies that the management server 120 is absent on the network 130, the present sequence cannot be continued and is therefore terminated. If the step S302 identifies the presence of the management server 120 on the network 130, there is requested confirmation of the license for permitting the log-on to the management server 120 (step S303).

In response to the issuance of the request for license confirmation in the step S303, there is discriminated whether the license management module 72 in the management server 120 judges that such request for confirmation is from a request from a proper host terminal apparatus (client side) and that the number of permissible accesses from other host terminal apparatus (server side) still has a vacancy, namely

whether the above-mentioned request for license confirmation is accepted (step S304).

5 If the step S304 identifies that the above-mentioned request for license confirmation is rejected at the side of the management server 120, the present sequence cannot be continued and is therefore terminated. If the step S304 identifies that the above-mentioned request for license confirmation is accepted by the management server 120, license
10 information in response to the request for license confirmation is received from the management server 120 (step S305) and the sequence starting from a subsequent step S306 is executed.

15 At first the addition of the own host apparatus is informed by broadcasting to other host terminal apparatus on the network 130 (step S306). Then there is acquired information of the shared device connected to the own host apparatus (step S307). Then the shared device information acquired in the step S307,
20 the access information (network information) of the management server 120, and the license information acquired in the step S305 are set, as the local management information as shown in Fig. 5, in the data area 82 (shared setting information storage area; cf.
25 Fig. 4) provided between the network client function 112 and the network server function 111 (step S308). Then there is discriminated whether a host terminal

apparatus having the entire network information management module 71 (management server 120 in this case) is present in the network 130, and there is also discriminated whether the information (resource information) set in the shared setting information storage area 82 in the step S308 is given to such host terminal apparatus (management server 120) (step S309).

If the step S309 identifies that the entire network information management module 71 in the network 130 and that the local management information (resource information) in the shared setting information storage area 82 is to be given to a host terminal apparatus (management server 120) having such module, such information is uploaded in the above-mentioned host terminal apparatus (management server 120) (step S310). Thus, the host terminal apparatus (management server 120) having the entire network information management module 71 manages the entire shared device management information as shown in Fig. 7, by means of such module 71. The present sequence is thereafter terminated.

If the step S309 identifies that the entire network information management module 71 is absent in the network 130, the entire shared resource management information as shown in Fig. 7 is retained in the individual host terminal apparatus and the process of

the step S310 need not be executed, so that the present sequence is immediately terminated.

[Status changing operation for the resource of host terminal apparatus (server side)]

5 Fig. 11 shows a sequence for changing the status of the resource locally connected to the host terminal apparatus 110₁, 110₂, 110₃, 120. This sequence is to change the shared resource management information as shown in Fig. 7 according to a change in the resource
10 information 206 in the local management information as shown in Fig. 5, and is executed by the network server function 111. This sequence is always executed when the host terminal apparatus is in the activated state, and monitors the arrival of a resource status changing
15 message (status change information) from the resource management modules 61₁ to 61_N.

 At first there is realized a stand-by state for receiving status change information (for example information indicating a change in the number of jobs
20 present in a printer resource) from the resource management modules 61₁ to 61_N, indicating a change in the status of the resource connected to the own host apparatus (step S321). The status change information is issued from the resource management modules 61₁ to
25 61_N in case of a status change in at least one of all the resources connected to the own host apparatus. When the status change information is received in the

When the status change information is received from the resource management modules 61₁ to 61_n, initialization is executed on the loop setting for acquiring the status information (step S322).

Then there is discriminated, by comparing the value of the loop counter with the set value N, whether the status confirmation process has been completed for all the resources connected to the own host apparatus (step S323).

If the step S323 identifies that the status confirmation process has been completed, the sequence proceeds to a step S327 to be explained later. If the step S323 identifies that the status confirmation process has not been completed, there is compared the status information of an i -th resource set in the resource information 206 of the local management information and the status information on the i -th resource contained in the status change information received in the step S321 (step S324). Based on the result of comparison in the step S324, there is

discriminated whether there is a change in the status of the i-th resource (step S325).

5 If the step S325 identifies that the status of the i-th resource has not been changed, the loop counter is counted up (step S329) and the sequence returns to the step S323 in order to process a next resource. If the step S325 identifies that the status of the i-th resource has been changed, the status information of the i-th resource currently set in the
10 resource information 206 of the local management information is renewed by the status information on the i-th resource contained in the status change information received in the step S321 (step S326). Thereafter the loop counter is counted up (step S329)
15 and the sequence returns to the step S323 in order to process a next resource.

When the status confirmation process is completed for all the resources connected to the own host apparatus (branched by the discrimination in the 323),
20 there is discriminated whether a setting, for broadcasting the change information in the status renewing process on the network 130, is turned on (step S327).

If the step S327 identifies broadcasting, the status information changed in the present sequence is
25 broadcast on the network 130 (step S328). Thus, in case the host terminal apparatus having the entire network information management module 71 (management

09578893-100400

server 120 in this case) is present in the network
130, the shared device management information (cf.
Fig. 7) held in such host terminal apparatus is
renewed by the above-mentioned change information, as
5 will be explained later in more details. In case the
host terminal apparatus having the entire network
information management module 71 is absent in the
network 130, the shared device management information
(cf. Fig. 7) held in the individual host terminal
10 apparatus is changed according to the change
information. Then the sequence returns to the step
S321 for awaiting the reception of the status change
information from the resource management modules 61₁ to
61_N.

15 If the step S327 identifies absence of
broadcasting, the sequence returns to the step S321 for
awaiting the reception of the status change
information from the resource management modules 61₁ to
61_N. Thus, in this case, the status change information
20 is not informed until a request for acquiring the
change information is received from another host
terminal apparatus.

[Status changing operation for the status
information of host terminal apparatus
25 (client side)]

Fig. 12 shows a sequence in the host terminal
apparatus 110₁, 110₂, 110₃, 120 according to the status

change information informed by the network server function 111 of another host terminal apparatus or the own host apparatus. This sequence is executed by the network client function 112.

5 At first there is entered a stand-by state for
awaiting the reception of a broadcast message by the
network server function 111 (step S331). When the
broadcast message is received in the step S331, there
is executed a sequence starting from a next step S332.

10 When a broadcast message is received from the
network server function 111, there is confirmed the
content of the message (step S332). Based on the
confirmation in the step S332, there is discriminated
whether the received message is from a partner from
15 which the own host apparatus is to acquire the
information (step S333).

If the step S333 identifies that the message is not from a partner from which the information is to be acquired, the sequence returns to the step S331 to enter the state of awaiting the reception of the broadcast message. If the step S333 identifies that the message is from a partner from which the information is to be acquired, initialization is executed on the loop setting for processing all the client expansion modules 31_1 to 31_N , (step S334). More specifically, the loop counter i is set at "0", and the upper limit set value N of the loop is set at the

number of the client expansion modules 31_1 to 31_N by referring to the client expansion function information etc. of the local management information shown in Fig. 6. Then there is discriminated, by comparing the value of the loop counter i with the set value N , whether the process has been completed for all the client expansion modules 31_1 to 31_N (step S335).

If the step S335 identifies that the process has been completed for all the client expansion modules 31_1 to 31_N , the sequence returns to the step S331 for awaiting the reception of the broadcast message. If the step S335 identifies that the process has not been completed for all the client expansion modules 31_1 to 31_N , the message received in the step S331 is transferred to the i -th client expansion module (step S336). The i -th client expansion module receiving the message in the step S336 discriminates whether such message is to be processed by the own module (step S337).

If the step S337 identifies that the message is not for processing by the own module, the i -th client expansion module informs the network client function 112 of such fact. Thus the network client function 112 counts up the loop counter (step S341) and the sequence returns to the step S335 for processing a next resource.

If the step S337 identifies that the message is

09678893-100400

for processing by the own module, the i-th client expansion module executes a process according to the message (step S338), and informs the network client function 112 of the result of the process. Thus the network client function 112 causes the shared device management information shown in Fig. 7 to reflect the result of process by the i-th client expansion module (step S339). Thus the result of the above-mentioned process is also reflected on the image on the CRT 16 as shown in Fig. 9, namely on the image according to the shared device management information (step S340). For example, the status information 272a, 276a as shown in Fig. 9 change according to the current resource status. Thereafter the sequence returns to the step S331 for awaiting the reception of a broadcast message.

[Information acquiring operation of designated resource]

Fig. 13 shows a process, in the host terminal apparatus 110₁, 110₂, 110₃, 120, for acquiring the status information of a designated resource. This process is effective in case, in the process shown in Fig. 11, the broadcast execution is set "OFF" in order to suppress the increase in the network traffic by the frequent broadcast issuances on the network 130 (cf. step S327 in Fig. 11), and is executed by the network client function 112.

As an example of the method for the user for designating the shared status, the user of the host terminal apparatus of the client side requests the status information by a manual operation from the

5 group of shared devices satisfying a certain condition, among the shared devices connected to other host terminal apparatus. The user designates a target group satisfying the desired condition, by executing a predetermined operation on the display image shown in

10 Fig. 9. The target group can be a group of shared devices connected in the unit of host terminals contained in a network group (domain etc.), or a group of shared devices connected in a certain specified unit of the host terminals, or a group (printer group

15 etc.) of shared devices of a certain category. For the purpose of simplicity of explanation, it is assumed to designate the desired shared devices in the same network 130, but such method is not restrictive and there may be designated the shared devices in

20 another network.

At first there is discriminated, by request information (status acquisition requesting information entered by the user) from the network client function 112 of another host terminal apparatus or the own host

25 apparatus, whether the target host terminal apparatus is a specified single host terminal apparatus or plural host terminal apparatus (step S351). If the

step S351 identifies that the target host terminal apparatus is composed of plural host terminal apparatus, there is acquired access information corresponding to such host terminal apparatus (in case of a domain such as NT, information of hosts belonging thereto, namely a list of hosts constituting the network group) from the shared resource management information as shown in Fig. 7 (step S352).

Then the loop counter is initialized for preparing request information on the target host terminal apparatus (step S354). More specifically, the loop counter is set at "0", and the upper limit set value N of the loop is set at the number of the access information (number of the target host terminal apparatus) acquired in the step S352.

On the other hand, if the step S351 identifies that the target host terminal apparatus is a specified single host terminal apparatus, there is acquired access information corresponding to such host terminal apparatus from the shared resource management information as shown in Fig. 7 and the loop counter is initialized for preparing request information to be explained later on such host terminal apparatus (step S353). More specifically, since there is only one target host terminal apparatus in this case, the loop counter is set at "0", and the upper limit set value N of the loop is set at "1".

5 If the step S355 identifies that the process has been completed for all the host terminal apparatus, the sequence proceeds to a step S364 to be explained later.

If the step S358 identifies that the target is a specified resource, the information corresponding to

such resource (password information, user identification information etc.) is acquired from the access information (cf. Fig. 7) acquired in the step S356 and is set in the request information (step S359). If the step S358 identifies that the target is not a specified resource, the information of all the shared resources (information 237₁ to 237_n in Fig. 7) included in the access information (cf. Fig. 7) acquired in the step S356 is set in the request information (step S360).

After the step S359 or S360, other information if necessary are set in the request information including various information set in these steps (step S361). Then the request information, that has been prepared in the step S361, is transmitted to the network client function 112 of the issuing source of the aforementioned status acquisition request information (network client function 112 of another host terminal apparatus or own host apparatus) (step S362). Then a response value is received from the target host terminal apparatus, and is reflected on the shared device management information shown in Fig. 7 (step S363). Thereafter the loop counter is counted up (step S365) and the sequence returns to the step S355 for processing a next host terminal apparatus.

When the process has been completed for all the host terminal apparatus as explained in the foregoing

(branched according to the discrimination of the step S355), the network client function 112, receiving the request information by the process of the step S362, causes such request information to be reflected on the image on the CRT 16 of the own host apparatus (step S364). In this manner the status information (272a, 276a etc.) is displayed on the icon of the desired shared device as shown in Fig. 9.

[Second embodiment]

In a second embodiment, there will be explained a host terminal apparatus capable of dynamically reflecting the status of the shared devices of such host terminal apparatus, in response to a log-on or a log-off of the host terminal apparatus on the network system. In the following there will be principally explained features newly added to the foregoing first embodiment.

[Access operation to a shared device under management by other host terminal apparatus]

Fig. 14 shows the function of the client side host terminal apparatus in case an arbitrary one (client side host terminal apparatus) of the host terminal apparatus 110₁, 110₂, 110₃, 120 uses a shared device connected to another host terminal apparatus (server side host terminal apparatus). The operation in this case are executed by the communication of the network client function 112 of the client side host

terminal apparatus with the network server function
111 of the server side host terminal apparatus.

At first there are acquired the network address
of a target host terminal apparatus (server side host
5 terminal apparatus) and the access information of a
desired shared device under the management thereof
(step S1421). More specifically, in case a host
terminal apparatus having the entire network
information management module 71 (namely the
10 management server 120 in this case) is present in the
network 130, the information of the target host
terminal apparatus (server side host terminal
apparatus) is acquired from the shared device
management information (cf. Fig. 7) held in such host
15 terminal apparatus. In case such host terminal
apparatus having the entire network information
management module 71 is absent in the network 130, the
information of the target host terminal apparatus
(server side host terminal apparatus) is acquired from
20 the shared device management information (cf. Fig. 7)
held in the own host apparatus.

Then, based on the information acquired in the
1422, an access is made to the desired shared device
of the server side host terminal apparatus for
25 acquiring the security information thereof (step
S1422). Then the content of the access information
acquired in the step S1421 and the security

information acquired in the step S1422 is confirmed to discriminate whether the own host apparatus (client side host terminal apparatus) has a right of access to the desired shared device of the partner (server side host terminal apparatus) (step S1423).

If the step S1423 identifies the absence of access right, the accessing process is interrupted and the present sequence is terminated. If the step S1423 identifies the presence of access right, there is discriminated whether the own host apparatus (client side host terminal apparatus) has ever made an access to the host terminal apparatus to be accessed (server side host terminal apparatus) (step S1424).

If the step S1424 identifies that the access has been made before, the local management information (cf. Fig. 5) of the own host apparatus (client side host terminal apparatus) is referred to and the log-on information therein is reset as the current log-on information for the host terminal apparatus to be accessed (server side host terminal apparatus) (step S1425). If the step S1424 identifies that the access has not been made before, namely the access for the first time, there is set new log-on information (step S1426). More specifically, the log-on information acquired for example by asking the input of an access password to the currently logged-on user is set as the current log-on information for the host terminal

apparatus to be accessed (server side host terminal apparatus).

After the process of the step S1425 or S1426, there are generated, together with the log-on
5 information set by such process, request data to the host terminal apparatus to be accessed (server side host terminal apparatus) according to the data configuration shown in Fig. 8 (step S1427). Then the request data generated in the step S1427 are
10 transmitted to the host terminal apparatus to be accessed (server side host terminal apparatus), and response data thereto are received (step S1428). Thereafter the present sequence is terminated.
[Renewal operation for shared device management
15 information within the network]

Fig. 15 shows a renewal operation for the shared device management information (cf. Fig. 7) in the network 130. As explained in the foregoing, if a host terminal apparatus having the entire network
20 information management module 71 (management server 120 in this case) is present in the network 130, the shared device management information is held by the entire network information management module 71. If the host terminal apparatus having the entire network
25 information management module 71 is absent in the network 130, the shared device management information is held by the individual host terminal apparatus.

09573333-100400

Such renewal process for the shared device management information is constantly executed by the client expansion function addition/deletion management module 23 and the server expansion function

5 addition/deletion management module 53 whenever the host terminal apparatus is in the activated state, constantly monitoring the arrival of a message from other host terminal apparatus on the network 130.

At first there is entered a state awaiting a
10 broadcast message from other host terminal apparatus (step S1431). If the step S1431 receives a message, there is executed a process starting from a next step S1432.

Upon receiving a message from another terminal
15 apparatus, there is confirmed the content of such message (step S1432). Based on the confirmation in the step S1432, there is discriminated whether the received message is from a host terminal apparatus from which the own host apparatus is to acquire the
20 information (step S1433).

If the step S1433 identifies that the received message is from a host terminal apparatus from which information is not be acquired, the sequence returns to the step S1431 for entering again a state awaiting
25 the message from other host terminal apparatus. If the step S1433 identifies that the received message is from a host terminal apparatus from which information

09578893-100400

If the step S1434 identifies a log-off message, the information of the host terminal apparatus which has transmitted such message is deleted from the shared device management information (step S1435). More specifically, in case the shared device management information is held by the individual host terminal apparatus, the information of the host terminal apparatus which has transmitted the log-off message is deleted from the shared device management information in the own host apparatus. In case the shared device management information is held by the entire network information management module 71, a deletion request is made to the host terminal apparatus having the entire network information management module 71 (management server 120 in this case). Thereafter the sequence returns to the step S1431 for entering again a state awaiting the message from other host terminal apparatus.

If the step S1434 identifies that the received message is not a log-off message, there is discriminated whether the message is a log-on message (step S1436). If the step S1436 identifies that the received message is not a log-on message, namely in case of reception of a message other than the log-on or log-off message, there is executed an appropriate

process matching the content of such message (step S1438). Thereafter the sequence returns to the step S1431 for entering again a state awaiting the message from other host terminal apparatus.

5 If the step S1436 identifies that the received message is a log-on message, there is discriminated where the shared resource management information is held (step S1437).

 If the step S1437 identifies that the shared
10 device management information is held by the entire network information management module 71, there is requested acquisition of the information of the host terminal apparatus which has transmitted the log-on message, to the host terminal apparatus having such
15 entire network information management module 71 (management server 120 in this case) (step S1440). Thereafter the sequence proceeds to a step S1441.

 If the step S1437 identifies that the shared device management information is held by the
20 individual host terminal apparatus, there is requested acquisition of detailed information to the host terminal apparatus which has transmitted the log-on message (step S1439). Thus the local management information (cf. Fig. 5) of the host terminal
25 apparatus which has transmitted the log-on message is returned to the own host apparatus. Thereafter the sequence proceeds to a step S1441.

09678893-100400

The information acquired in the step S1439 or
!440 is added to (or renews) the shared device
management information (step S1441).
[Log-off operation of host terminal apparatus]

5 Fig. 16 shows the log-off operation of the host
terminal apparatus 110₁, 110₂, 110₃, 120.

At first there is discriminated whether the own
host apparatus is in the course of execution of a
process based on a request from another host terminal
10 apparatus (step S1451). If the step S1451 identifies
that the process is not in execution, the sequence
proceeds to a step S1454, skipping next steps S1452
and S1453.

If the step S1451 identifies that the process is
15 in execution, there is informed the interruption of
such process to the host terminal apparatus which has
requested such process (step S1452).

After confirmation that a response permitting the
interruption is returned, in response to the
20 informing, from the addressee host terminal apparatus
of such informing, the process currently executed is
interrupted (step S1453).

After the process of the step S1453 or in case
the step S1451 identifies that the process is not in
25 execution, namely when the own host apparatus is no
longer in the state of process execution, the log-off
operation of the own host apparatus is informed by

broadcasting to other host terminal apparatus on the network 130 (step S1454). Also the host terminal apparatus having the management function (manager server 120 in this case) is informed of the release of the log-on license given to the own host apparatus at the log-on operation (step S1455). Thereafter the ending process for the own host apparatus is executed in continuation (step S1456).

In the second embodiment, as explained in the foregoing, in response to the log-on or log-off operation of a host terminal apparatus on the network system, the status of the shared device of such host terminal apparatus can be dynamically reflected.
[Third embodiment]

As a third embodiment, there will be explained an improvement on the process (start-up flow of the host terminal apparatus) of the first embodiment shown in Fig. 10. In the third embodiment, the management side only manages the license information and the log-on list of the host terminals, and, in case of not managing the shared device information of the host terminal, acquires the shared device information from each host terminal. In the following there will be principally explained the features newly added in the third embodiment.

A step S1701 detects the presence of a terminal apparatus having the management function (management

09678893-100400

server) on the network. Based on the result of such detection, a step S1702 discriminates whether the management server is present. The detection of the management server and the discrimination of presence thereof can be achieved, for example, by broadcasting a message inquiring the presence of the management server to the entire network and judging the presence of a response thereto.

If the step S1702 identifies that the management server is absent on the network, the process cannot be continued further and is therefore terminated. If the step S1702 identifies the presence of the management server, a step S1703 requests confirmation of the license for log-on permission to the management server.

The confirmation of the license in the step S1704 identifies that such request is from a proper host terminal apparatus and that the number of permissible accesses in the server side still has a vacancy, the sequence branches to a step S1705. If the effective license is judged absent, the sequence cannot be continued further and is therefore terminated.

A step S1705 receives the license information from the management server. A step S1706 acquires the shared device information of the own host apparatus. Then a step S1707 sets the acquired shared device information, the network information for accessing to

the management server and the license information
acquired in the step S1705, as the local information,
in the shared setting information storage area
provided between the network client function and the
5 network server function.

Then a step S1708 discriminates whether the
entire network information management module is set in
the management server and whether uploading of the
shared device information of the own host apparatus is
10 instructed to such module. If the uploading is
instructed, the sequence proceeds to a step S1709,
but, if not instructed, the sequence proceeds to a
step S1710.

A S1709 uploads the shared device information of
15 the own apparatus to the management server, whereby
other host terminals on the network can acquire the
shared device information of the newly added host
terminal by inquiring to the management server.
Thereafter the sequence proceeds to a step S1713.

Steps S1710 to S1712 are a process in case the
management server does not manage the shared devices
on the network. A step S1710 acquires, from the
management server, a network information list of other
logged-on host terminals. A step S1711 acquires the
25 shared device information from the individual host
terminals, according to the information of the
above-mentioned list. A step S1712 prepares the

09678893-104400

entire shared device information on the network as shown in Fig. 7, based on the information acquired in the step S1711, and sets such entire shared device information in the shared setting information storage area of the server/client modules.

As all the access information setting relating to the network is completed, a step S1713 broadcasts the addition of the own apparatus to other host terminals on the network, in order to inform that the own apparatus is being ready. Thus all the processes are completed.

In the third embodiment, as explained in the foregoing, it is rendered possible to manage the resource (shared device) usable by other terminals through the network even in case the management terminal does not manage the information of the shared device of the individual host terminals, thereby efficiency checking status of the resources.

[Fourth embodiment]

As a fourth embodiment, there will be explained a method of applying the present invention to a network system not containing the management server terminal. In the present embodiment, at the start-up of the host terminal, there is not executed the process of confirming the license to the management server terminal. More specifically, there is given an example of the process in case the function is present

in the host terminal with the local license. For example, in case of Windows system (trade name), the first to third embodiments provide license management by domains, while the fourth embodiment provides
5 license management by work groups. In the following there will be principally explained the features newly added to the fourth embodiment.

Fig. 18 is a flow chart of a start-up process of the host terminal in case the management server
10 terminal is absent. In the following description will be given according to the flow chart shown in Fig. 18.

A step S1801 acquires the shared device information of the own apparatus. A next step S1802 sets the above-mentioned shared device information, as
15 the local information, in the shared setting information storage area provided between the network client function and the network server function. A step S1803 broadcasts the addition of the own apparatus to other host terminals in the network, in
20 order to inform that the shared device of the own apparatus has become ready for disclosure. A step S1804 awaits the response from other host terminals, in return for the above-mentioned broadcast message informing the above-mentioned addition. The network
25 address of the partner can be acquired from the response of another host terminal.

A step S1805 discriminates whether the response

09678893-100400

is made within a predetermined time, and, if the response is judged present, the sequence proceeds to a step S1806, but, if the response is judged absent, the start-up process is terminated.

5 A step S1806 requests, to each host terminal giving the response, the shared device information of such host terminal. A step S1807 prepares the entire shared device information on the network as shown in Fig. 7, based on the shared device information of the
10 host terminals on the network, obtained in the step S1806, and additionally sets such entire shared device information to the shared setting information storage area of the server/client modules, whereupon the process is terminated.

15 In the fourth embodiment, as explained in the foregoing, it is rendered possible, even in the network system in which the management terminal is not present, to manage the resource (shared device) usable by other terminal apparatus through the network,
20 thereby efficiently checking the status of the resources.

 The objects of the present invention can naturally be attained also in a case where a memory medium storing the program codes of a software
25 realizing the functions of the host and terminals of the aforementioned embodiments is supplied to a system or an apparatus and the functions of the

00678893-100400

aforementioned embodiments are realized by a computer (CPU or MPU) of the above-mentioned system or apparatus by reading and executing the program codes stored in the memory medium. In such case the program codes themselves realize the functions of the embodiments of the present invention, and the memory medium storing the program codes constitutes the present invention.

The memory medium storing such program codes can be, for example, a ROM, a floppy disk, a hard disk, an optical disk, a magnetooptical disk, a CD-ROM, a CR-R, a magnetic tape, or a non-volatile memory card.

The present invention also includes not only a case where the functions of the aforementioned embodiments are realized by the execution of the program codes read by the computer but also a case where an operating system or the like functioning on the computer executes all or a part of the actual processes under the control of such program codes thereby realizing the functions of the foregoing embodiments. The present invention further includes a case wherein the program codes read from the memory medium are once stored in a function expansion board inserted into the computer or a function expansion unit connected to the computer, and a CPU provided in the function expansion board or the function expansion unit executes all the process or a part thereof under

the control of such program codes, thereby realizing the functions of the aforementioned embodiments.

According to the present invention, as explained in the foregoing, there are provided both the server
5 means and the client means, and communication means for connecting these means whereby the information exchange can be achieved in the same manner regardless whether it is with another apparatus or within the own apparatus. Also there are provided both server
10 expansion means as an expanded function of the server means having a general interface and client expansion means as an expanded function of the client means having a general interface. Also the information of the shared devices present on the network is managed
15 in unified manner, and the management information of the shared devices is automatically renewed with the latest information, by the information of such shared device (for example the information disclosed in case of a status change) disclosed from the terminal
20 apparatus having such shared device. Furthermore, the information of the shared device designated by the client means side is acquired from the management information of the shared devices and is provided. It is thus rendered possible to easily acquire the
25 information of the shared devices on the network and to efficiently manage such information.

It is also possible to manage the management

09678883-100400

information of the shared devices constantly as the latest information, and to provide the information of the shared device designated from the user, based on such management information. For example, in case the
5 management information of the shared devices is displayed, the user can easily and exactly confirm the status of the current shared devices and can acquire the status of the desired shared device only.

10

090708093.100400

WHAT IS CLAIMED IS:

1. An information processing apparatus for use
in a network system provided with plural information
processing apparatus to which connected is a shared
5 device so functioning as to be usable from other
apparatus through the network, the apparatus
comprising:

management means for managing the information of
a shared device present in said network system;

10 reception means for receiving the information of
a shared device connected to another information
processing apparatus;

transmission means for transmitting the
information of a shared device connected to the own
15 apparatus to apparatus on said network system; and

renewal means for renewing the information of the
shared device in said management means, based on the
information received by said reception means.

20 2. An information processing apparatus according
to claim 1, wherein said reception means includes
first reception control means for designating a group
satisfying a predetermined condition and receiving the
information of the shared device included in said
25 group.

3. An information processing apparatus according

03678893.100400

to claim 1, wherein said reception means includes
second reception control means for detecting log-on of
another information processing apparatus to said
network system and receiving the information of the
5 shared device of said another information processing
apparatus.

4. An information processing apparatus according
to claim 1, wherein said reception means is adapted,
10 at the log-on to said network system, to automatically
receive the information of the shared device present
in said network system.

5. An information processing apparatus according
15 to claim 1, wherein said transmission means is
adapted, in response to the detection of a change in
the status of a shared device connected to the own
apparatus, to transmit information on the status after
said change.

20 6. An information processing apparatus according
to claim 1, wherein said transmission means is
adapted, at the log-on to said network system, to
automatically transmit the information of the shared
25 device connected to the own apparatus.

7. An information processing apparatus according

to claim 1, wherein said renewal means is adapted, in response to the detection of log-off of another information processing apparatus from said network system, to invalidate the information of the shared device of said another information processing apparatus in said management means.

8. An information processing apparatus according to claim 1, wherein said transmission means is adapted, in informing the information of the shared device connected to the own apparatus to another information processing apparatus, to selectively execute a first method for transmission to a predetermined management apparatus on said network system or a second method for transmission to another information processing apparatus through said network system.

9. An information processing method for use in a network system provided with plural information processing apparatus to which connected is a shared device so functioning as to be usable from other apparatus through the network, the method comprising:

a management step of managing the information of a shared device present in said network system by management means;

a reception step of receiving the information of

a shared device connected to another information processing apparatus;

5 a transmission step of transmitting the information of a shared device connected to the own apparatus to apparatus on said network system; and

a renewal step of renewing the information of the shared device in said management means, based on the information received by said reception step.

10 10. An information processing method according to claim 9, wherein said reception means includes a first reception control step of designating a group satisfying a predetermined condition and receiving the information of the shared device included in said
15 group.

11. An information processing method according to claim 9, wherein said reception step includes a second reception control step of detecting log-on of
20 another information processing apparatus to said network system and receiving the information of the shared device of said another information processing apparatus.

25 12. An information processing method according to claim 9, wherein said reception step is adapted, at the log-on to said network system, to automatically

receive the information of the shared device present in said network system.

13. An information processing method according
5 to claim 9, wherein said transmission step is adapted, in response to the detection of a change in the status of a shared device connected to the own apparatus, to transmit information on the status after said change.

10 14. An information processing method according to claim 9, wherein said transmission step is adapted, at the log-on to said network system, to automatically transmit the information of the shared device connected to the own apparatus.

15 15. An information processing method according to claim 9, wherein said renewal step is adapted, in response to the detection of log-off of another information processing apparatus from said network
20 system, to invalidate the information of the shared device of said another information processing apparatus in said management means.

25 16. An information processing method according to claim 9, wherein said transmission step is adapted, in informing the information of the shared device connected to the own apparatus to another information

09578893.104400

processing apparatus, to selectively execute a first
method for transmission to a predetermined management
apparatus on said network system or a second method
for transmission to another information processing
5 apparatus through said network system.

17. A computer readable memory which stores a
program to be executed by a computer of an information
processing apparatus for use in a network system
10 provided with plural information processing apparatus
to which connected is a shared device so functioning
as to be usable from other apparatus through the
network, the program comprising:

a management step of managing the information of
15 a shared device present in said network system by
management means;

a reception step of receiving the information of
a shared device connected to another information
processing apparatus;

20 a transmission step of transmitting the
information of a shared device connected to the own
apparatus to apparatus on said network system; and

a renewal step of renewing the information of the
shared device in said management means, based on the
25 information received by said reception step.

18. A computer readable memory according to

claim 17, wherein said reception means includes a
first reception control step of designating a group
satisfying a predetermined condition and receiving the
information of the shared device included in said
5 group.

19. A computer readable memory according to
claim 17, wherein said reception step includes a
second reception control step of detecting log-on of
10 another information processing apparatus to said
network system and receiving the information of the
shared device of said another information processing
apparatus.

20. A computer readable memory according to
claim 17, wherein said reception step is adapted, at
the log-on to said network system, to automatically
receive the information of the shared device present
in said network system.

21. A computer readable memory according to
claim 17, wherein said transmission step is adapted,
in response to the detection of a change in the status
of a shared device connected to the own apparatus, to
25 transmit information on the status after said change.

22. A computer readable memory according to

FIG. 1

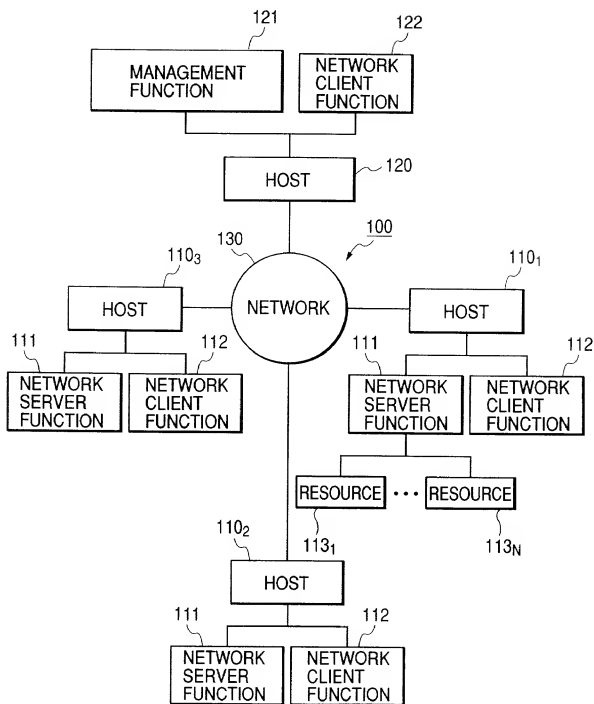


FIG. 2

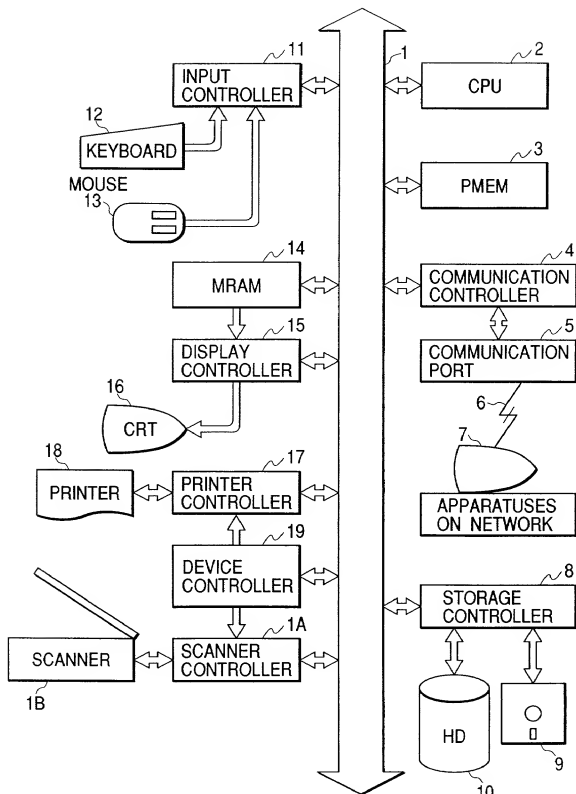


FIG. 3

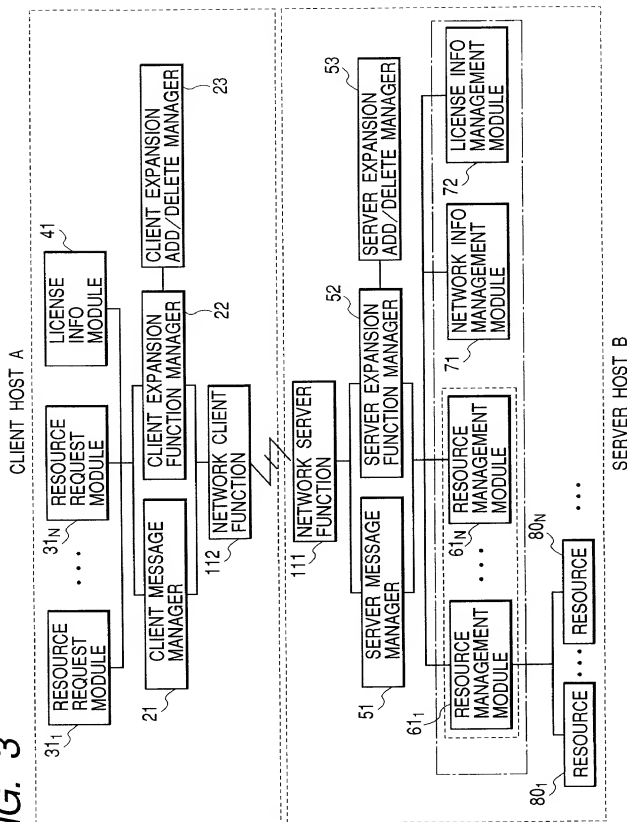


FIG. 4

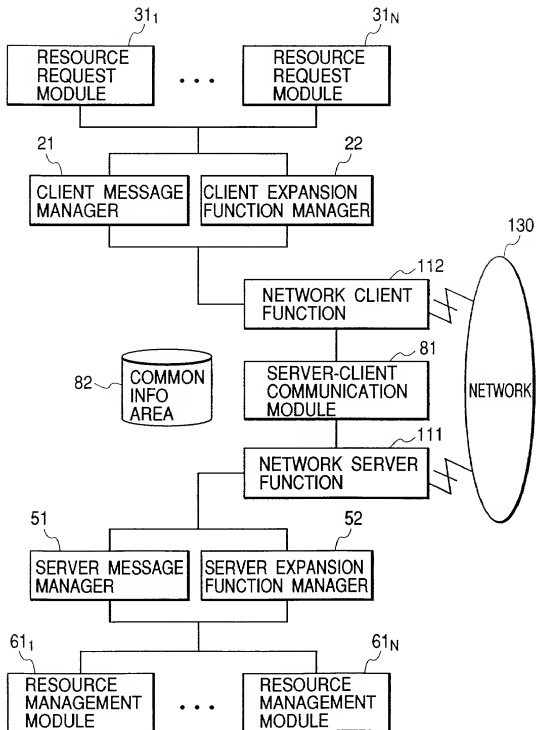


FIG. 5

NO. OF ITEMS	201
NETWORK ADDRESS OF OWN HOST	202
LOGON USER	203
SECURITY MANAGEMENT	204
SERVER EXPANSION FUNCTION	205
RESOURCE OF OWN HOST	206
CLIENT EXPANSION FUNCTION	207
LICENSE	208
OTHERS	209

FIG. 6

NO. OF ITEMS		211
RESOURCE TYPE		212
OTHERS		213
214 ₁ INFO ON RESOURCE R ₁	RESOURCE NAME	215
	NETWORK NAME	216
	SECURITY	217
	DRIVER	218
	COLOR	219
	EXPANSION FUNCTION	220
	STATUS	221
	OTHERS	222
⋮		
INFO ON RESOURCE R _N		214 _N

FIG. 7

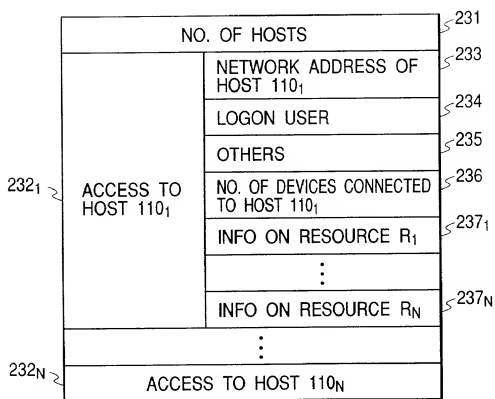


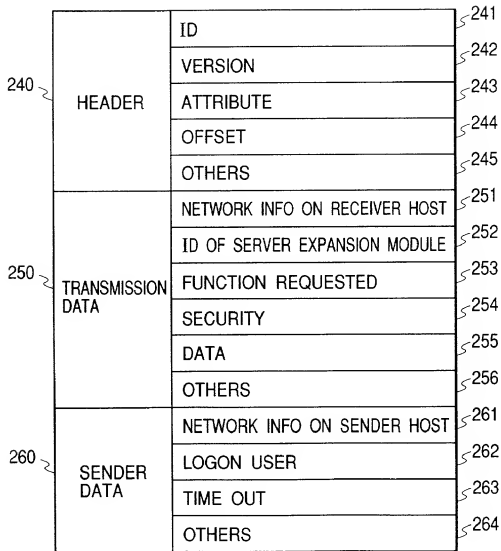
FIG. 8

FIG. 9

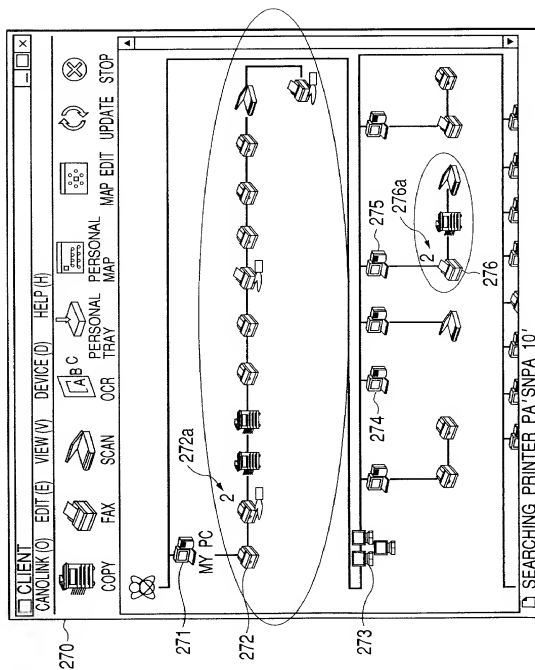


FIG. 10

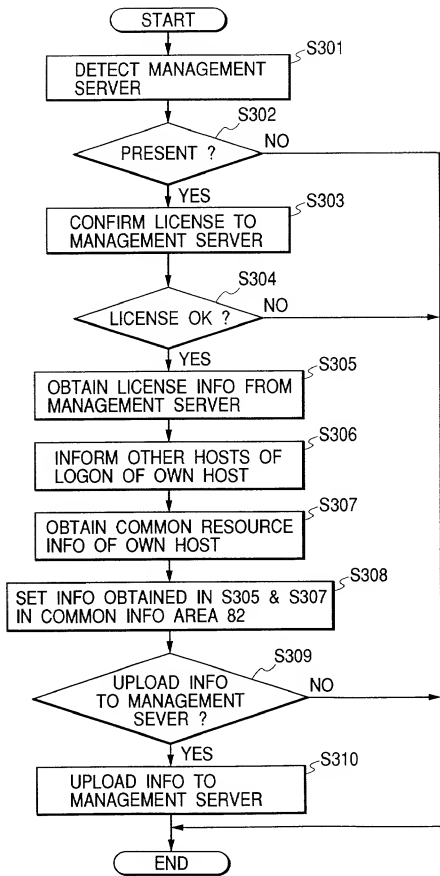


FIG. 11

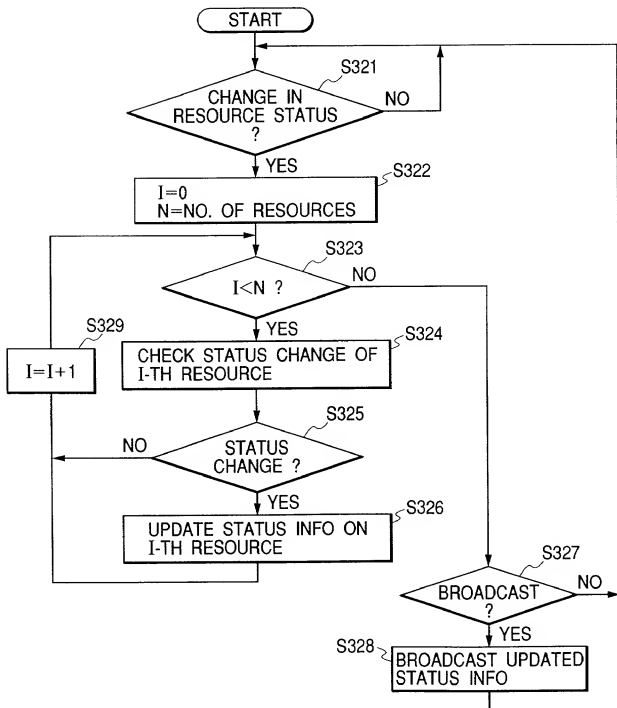


FIG. 12

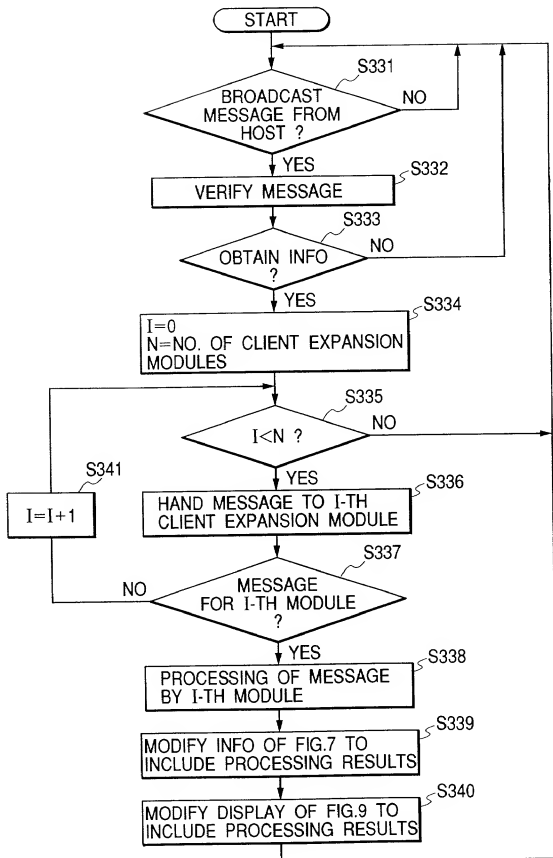


FIG. 13

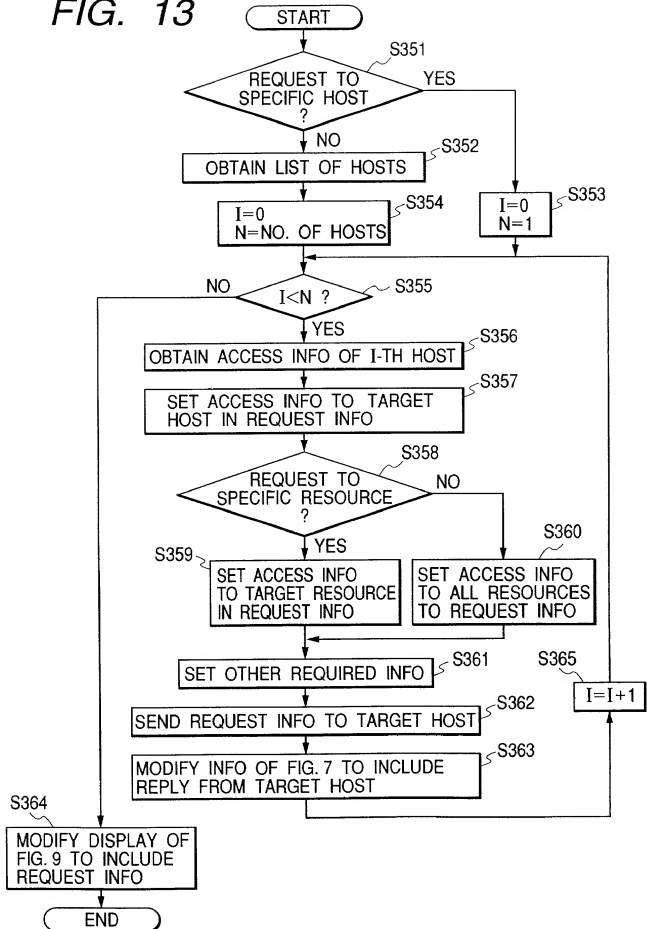


FIG. 14

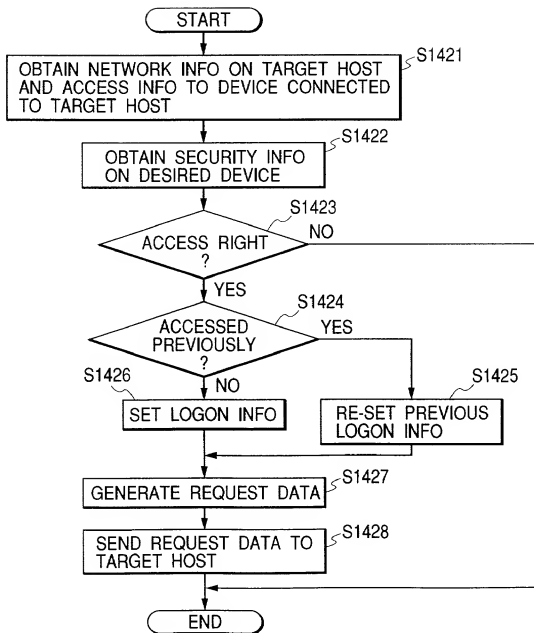


FIG. 15

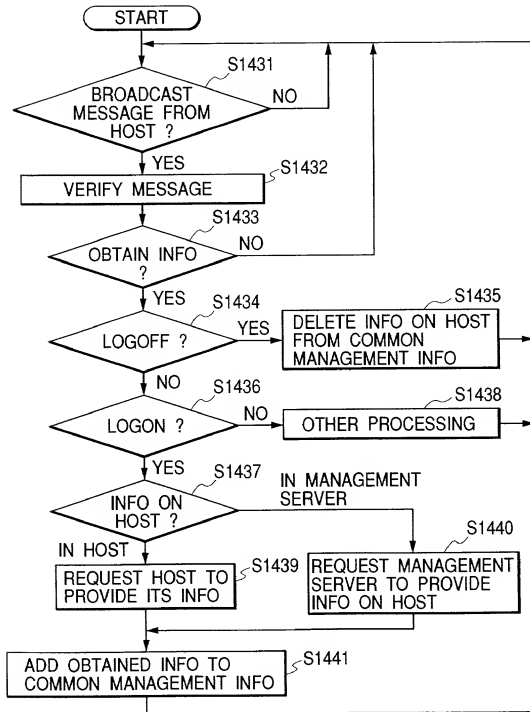


FIG. 16

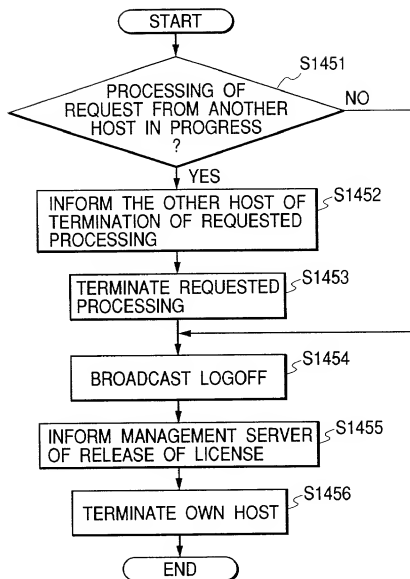


FIG. 17

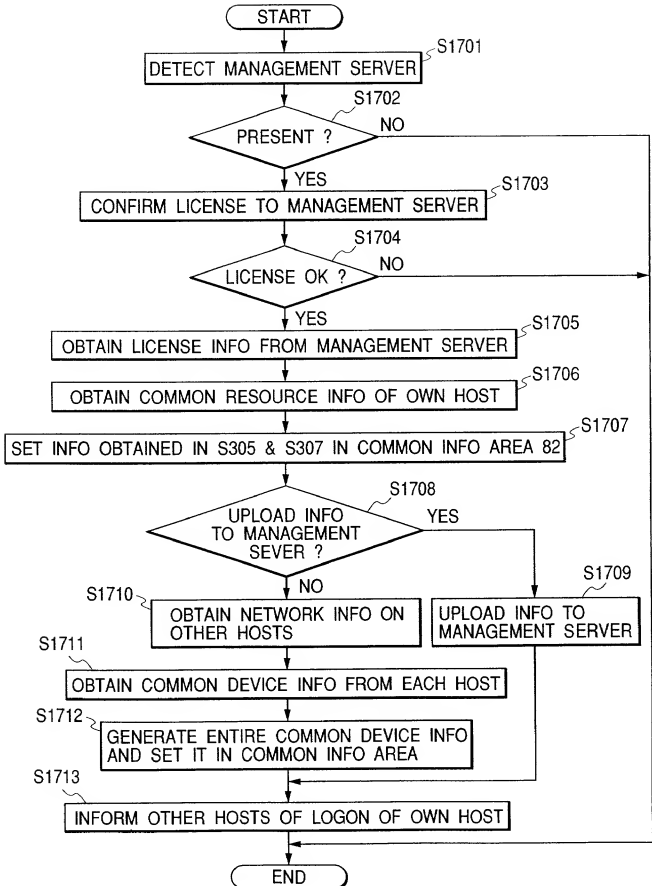


FIG. 18

